




### PRODUCT



### DESCRIPTION


- Opening angle: 110°
- Depth of hinge cup: 11.5mm
- Diameter of hinge cup: 35mm
- Range of door thickness: 16-26mm
- Possible drilling distances on the door(K): 3-6 mm

### APPLICATION

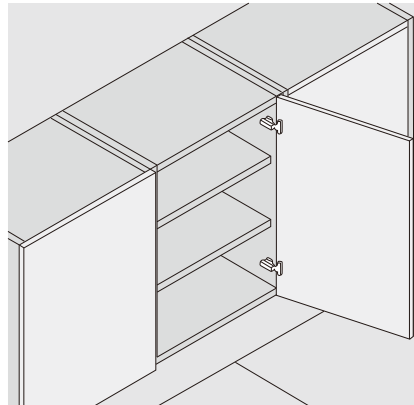


### PLANNING

#### Space needed to open the door



	T=	16	17	18	19	20	21	22	23	24	25	26
K=3	A=	0.7	0.9	1.2	1.5	1.8	2.2	2.6	3.2	3.8	4.5	5.3
K=4	A=	0.7	0.9	1.1	1.4	1.8	2.1	2.5	3.0	3.5	4.4	4.9
K=5	A=	0.6	0.9	1.1	1.4	1.7	2.0	2.4	2.9	3.4	3.9	4.6
K=6	A=	0.6	0.8	1.1	1.3	1.6	2.0	2.4	2.8	3.2	3.8	4.4


#### Space needed to open the door



	T=	16	17	18	19	20	21	22	23	24	25	26
K=3	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1
K=4	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.4	0.7	0.9	1.1
K=5	L=	0.0	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.0
K=6	L=	0.9	1.2	1.4	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0

- The above values are calculated on the assumption that the doors have square edges.
- They are reduced if the doors have radiused edges.


#### Projection of the door

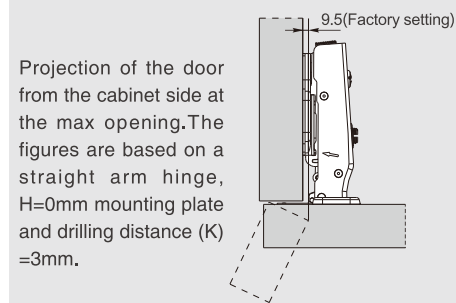

#### "C" value

$$C=20+K+A$$

With this formula you can obtain the max thickness of the moulded door that can be opened without touching adjacent carcass sides, doors or walls, whilst bearing in mind the above L-K-T values.

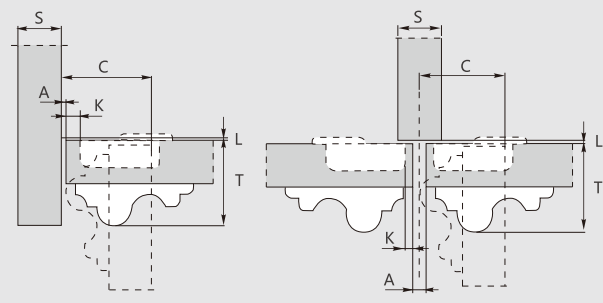


### ORDER INFORMATION




#### Φ 35mm Options of screws and dowels:

M10 dowel Dowel No: <b>M</b>	Expandable dowel Dowel No: <b>K</b>
M8 dowel Dowel No: <b>N</b>	Expandable dowel Dowel No: <b>K0</b>
Euro screw Dowel No: <b>B</b>	Quick dowel Dowel No: <b>T0</b>

#### Φ 35mm Hinge cup types

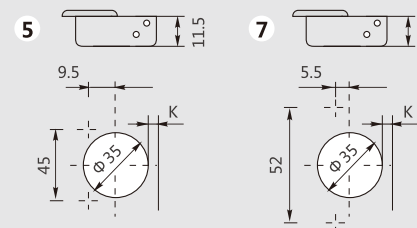

Use these formulas to determine the type of hinge arm, the drilling distance "K" and the height of the mounting plate "H" for each door application.




Nickel plated(A01)      Specially treated(A11)

#### C80 Series 110° snap-on cam-adjustable soft-close hinges

##### Full overlay C=0



H=12+K-(D)  
(Factory setting)




	Item No.	Pcs/ctn
Soft-close	<b>C80A676F</b>	200
Sprung	<b>C80A676</b>	200

##### Half overlay C=9



H=3+K-(D)  
(Factory setting)




	Item No.	Pcs/ctn
Soft-close	<b>C80B676F</b>	200
Sprung	<b>C80B676</b>	200

##### Inset C=18



H=6+K+(A)  
(Factory setting)



	Item No.	Pcs/ctn
Soft-close	<b>C80C676F</b>	200
Sprung	<b>C80C676</b>	200